

Optimization of DG Placement and Size Using PSO Based on GUI

By Saidah Saidah

Optimization of DG Placement and Size Using PSO Based on GUI

1st Saidah
 Electrical Engineering Department
 Universitas Bhayangkara Surabaya
 Surabaya, Indonesia
 saidah@ubhara.ac.id

2nd Muhamad Masrufun
 Electrical Engineering Department
 Universitas Bhayangkara Surabaya
 Surabaya, Indonesia
 masrufun86@gmail.com

Abstract—The increasing demand for electricity at this time raises several problems to the power quality in the distribution network system. This is an opportunity to develop the power distribution network system. Distributed generation (DG) or small power plant spread over the distribution network level is one solution that could increase the power quality of the distribution system. Installation of distributed generation (DG) could increase the value of voltage, reduce power losses in the line, improve the reliability system, power quality, preventing drop voltages on the distribution network, maintain voltage level according to established standards and also as back up generation and voltage support especially at the summit load in the distribution network. So in accordance with the things described above it is designed a simulator determining the location and size of the optimally distributed generation (DG) by using Particle Swarm Optimization. In this simulator using the Graphical User Interface (GUI) system, so that in determining location, there's an easy view to understanding and it's expected to be used as non-technical considerations on the installation of distributed generation (DG).

Keywords—Distributed Generation (DG), PSO method, GUI

I. INTRODUCTION

An increase in electrical power demand raises several problems with the quality of power in the electricity distribution network system. This is an opportunity to develop and update the electrical power distribution network system to improve the quality of electricity services to customers. Distributed generation (DG) or electric power plants that are spread at the distribution network level is one solution that can improve the quality of electric power. Installation of distributed generation (DG) can reduce voltage drop, reduce power losses in the network, improve the level of reliability and technical safety parameters and reduce the flow congestion on the distribution network.

In previous research [1-2] has been discussed regarding the determination of the location and optimal DG using the Loss Sensitivity Factor method, then the PSO method [3-8]. These methods only display the voltage profile and do not display charts of active power losses, reactive power losses, or cos phi. Whereas in other research using Genetic Algorithms [9], Flower Pollination Algorithm (FPA) [10] and Artificial Bee Colony [11-12] the results obtained were not validated using other methods such as Newton Raphson [13], so the resulting data only refers to one method and also does not display Network SLD or Single Line Diagram.

This paper aims to optimize the placement and capacity of the DG to reduce power losses and improve the voltage profile on the system. This research was conducted with the distribution system model of the city of Surabaya, BasukiRahmat, using the Particle Swarm Optimization (PSO) method. In general, there is a type of DG. Type (1): active power supply, (2): reactive power supply, (3): active and reactive power supply, (4): active power supply and absorb reactive power. In this research, used DG with the type that can provide active and reactive power supply by referring to the leading of 0.8 - 0.9 power factor. This research uses two methods of power flow analysis, the first using Network Topology as the main data processor and the Modified Newton Raphson method as validation. For the interface using the Graphical User Interface (GUI) so that the data is presented to be more easily understood.

II. PROPOSED SYSTEM

Fig. 1 is a flowchart of the Optimization of DG Determination and size using PSO based on GUI

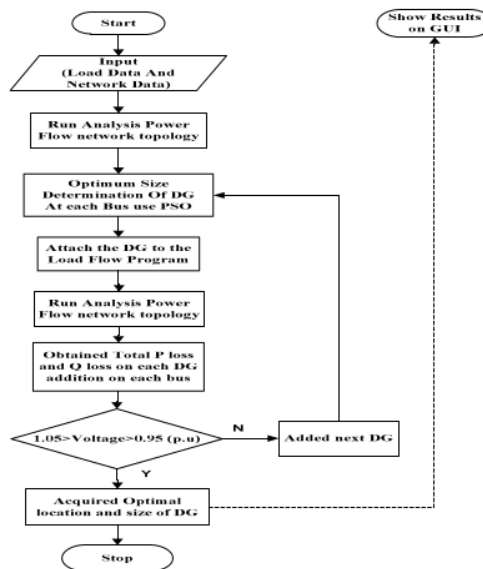


Fig. 1. Flowchart of Determination of Location and size DG

The flowchart in Fig 1. shows the application of PSO methods to determine the optimal location and size of DG for radial systems. In this research, a single line IEEE 33 bus diagram will be used as an object of comparison with other methods and is used as a validation of the results of the PSO method.

If the PSO method validation stage has been completed, then the PSO method will be applied to the electrical systems of the Surabaya city of Basuki Rahmat feeder. Graphical User Interface (GUI) is used in this study so that the data input process can be fast and practical and the results of determining the optimal DG location and size displayed are easy to understand. Power flow analysis is needed to determine the initial condition of the system, before it is carried out by adding DG to the system, which is seen from several parameters such as voltage, current, power factor, power flow from source to load and losses on the network.

A. Particle Swarm Optimization (PSO)

The Particle Swarm Optimization (PSO) algorithm was introduced by Kennedy and Eberhart in 1995, the algorithmic process inspired by social behavior in the flocks of birds that flew together [8]. Particle swarm optimization is a computational method that optimizes problems by iteratively trying to improve candidate solutions related to certain quality measures.

The following are the steps of the PSO process:

1. Determine the size of the swarm and determine the initial value of the position and speed of the particles randomly.
2. Evaluate the value of the objective function for each particle.
3. Determine Pbest and Gbest first.
4. Calculate the speed of the next iteration with (1)

$$V_j(i) = \theta V_j(i-1) + c_1 r_1 [Pbest, j - X_j(i-1)] + c_2 r_2 [Gbest - X_j(i-1)] \quad (1)$$

$$i = \text{iteration}; j = 1, 2, 3, \dots, N; r_1 \text{ and } r_2 \text{ are random numbers}$$
5. Determine the position of the particles in the next iteration using (2)

$$X_j(i) = X_j(i-1) + V_j(i) \quad (2)$$
6. Evaluate the value of the objective function in the next iteration
7. Updating Pbest and Gbest
8. Check whether the solution is optimal or not. If it is optimal, the algorithm process stops, but if it is not optimal, iterates again.

The main advantage of the PSO algorithm is that it has a simple concept, is easy to implement, is more flexible in maintaining a balance between global and local search for its search space and is efficient in calculations.

B. Network Topology For Load Flow Analysis

Electrical power flow analysis has various methods in analyzing an electric power system. Network topology is one method of power flow analysis which in its solution uses a network topology modeling to form a mathematical equation, which is then calculated and iterated to obtain the current value, voltage, power losses and the total generation power needed by the system. Network topology power flow analysis is very suitable to be applied in power systems with radial network topology. Following is an example of a radial system as shown in Fig. 1.

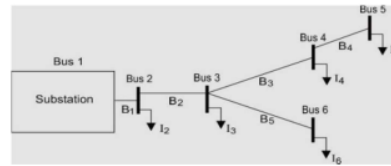


Fig. 2. Radial System

The initial step is to calculate the amount of current flowing on the network that is modeled in the form of a BIBC (Bus Injection to Branch Current) matrix. The value of network current can be written (3):

$$I_n = \begin{pmatrix} P_n + jQ_n \\ V_n \end{pmatrix} \quad (3)$$

By applying the Kirchoff Current Laws equation to the network, the current injection on each bus can be modeled into a matrix function. Networks are modeled with variables B1 – B5. The current injection equation for each bus use equation (3) can be modeled into a matrix. The results of the modeling into the matrix is

$$\begin{bmatrix} B_1 \\ B_2 \\ B_3 \\ B_4 \\ B_5 \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 \\ 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} I_1 \\ I_2 \\ I_3 \\ I_4 \\ I_5 \end{bmatrix} \quad (4)$$

Then a simpler equation can be written as

$$[B] = [BIBC][I] \quad (5)$$

The relationship between current and voltage can be obtained through (6)

$$\begin{aligned} V_2 &= V_1 - B_1 Z_{12} \\ V_3 &= V_2 - B_2 Z_{23} \end{aligned} \quad (6)$$

$$V_4 = V_3 - B_3 Z_{34}$$

Where Z_{12} , Z_{23} , Z_{34} are the network impedances of sections 1-2, 2-3 and 3-4. By substituting equations (4) and (5) into equation (6), the voltage on bus 4 can be written as:

$$V_4 = V_1 - B_1 Z_{12} - B_2 Z_{23} - B_3 Z_{34} \quad (7)$$

Furthermore, the bus voltage can be arranged in a matrix function of network current (BIBC), so that the BCBV (Branch Current to Branch Voltage) matrix is obtained in the same way as the above method is obtained (8) BCBV (Branch Current to Branch Voltage) matrix.

$$\begin{bmatrix} V_1 \\ V_1 \\ V_1 \\ V_1 \\ V_1 \\ V_1 \end{bmatrix} - \begin{bmatrix} V_2 \\ V_3 \\ V_4 \\ V_5 \\ V_6 \end{bmatrix} = \begin{bmatrix} Z_{12} & 0 & 0 & 0 & 0 \\ Z_{12} & Z_{23} & 0 & 0 & 0 \\ Z_{12} & Z_{23} & Z_{34} & 0 & 0 \\ Z_{12} & Z_{23} & Z_{34} & Z_{45} & 0 \\ Z_{12} & Z_{23} & 0 & 0 & Z_{36} \end{bmatrix} \begin{bmatrix} B_1 \\ B_2 \\ B_3 \\ B_4 \\ B_5 \end{bmatrix} \quad (8)$$

Then a simpler equation can be written as :

$$[\Delta V] = [BCBV][B] \quad (9)$$

Substituting (3) to (9) then at the end of the decline the value ΔV can be written with (9) and simplified to (10) as follows:

$$[\Delta V] = [BCBV][BIBC][I] \quad (10)$$

$$[\Delta V] = [DLF][I]$$

Where, $[DLF] = [BCBV][BIBC]$

$$[\Delta V^{k+1}] = [DLF][I^k]$$

$$[V]^{k+1} = [V_1] - [\Delta V^{k+1}] \quad (11)$$

V_1 is the voltage of the Swing bus, so from (10) is obtained a voltage deviation value for each bus, then it will be updated to a value of (11) in each iteration, so that's obtained a valid voltage after the iteration becomes convergent.

C. Determination of Distributed Generation (DG) Size

Determination of the optimal size of distributed generation (DG) in a radial distribution system is explained as follows.

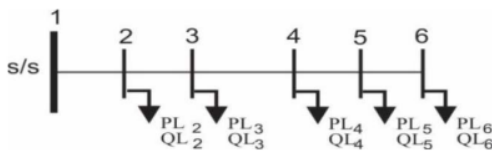


Fig. 3. Simple Example of a Radial System

From Fig.2, the distribution system model above can be modeled into the form of a simple mathematical equation, as shown in equations (12) and (13).

$$P_2 = \sum_{i=2}^{NB=6} PL_i + \sum_{i=2}^{NB-1} Ploss'_i \quad (12)$$

$$Q_2 = \sum_{i=2}^{NB=6} QL_i + \sum_{i=2}^{NB-1} Qloss'_i \quad (13)$$

From (12) and (13), it is shown that total active and reactive power is the total load and power losses in the network. Then bus 4 is installed a distributed generation (DG) is shown in Fig. 3.

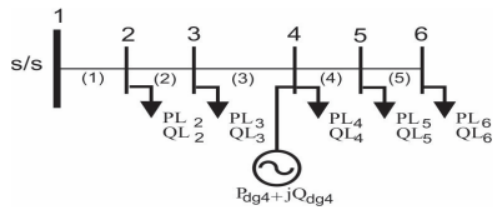


Fig. 4 Radial system installed (DG)

D. Determination of Distributed Generation Locations (DG)

After all, the buses get the optimal distributed generation (DG) installation size, furthermore, determine the optimal distributed generation (DG) location. In the stage of determining the location of distributed generation (DG) the calculation of TPloss values is carried out using (13) so that the optimal DG location and size are obtained and the DG installation is then performed at that location. To evaluate other parameters such as the voltage profile, power flow analysis is performed. If the result of the voltage value does not meet the predetermined constraint, then the next distributed generation (DG) size ranking will be obtained until the voltage is obtained that meets the constraint.

III. RESULT AND DISCUSSION

This system has been tested using a single line diagram for the IEEE 33 bus distribution system and a single line diagram in the Basuki Rahmat Surabaya feeder. Fig. 5 is a single line diagram on the Basuki Rahmat Surabaya feeder, while Table I and Table II are the load data and network data on the Basuki Rahmat Surabaya feeder.

Table III. is a result of the voltage profile program on the Basuki Rahmat feeder system before and after DG installation.

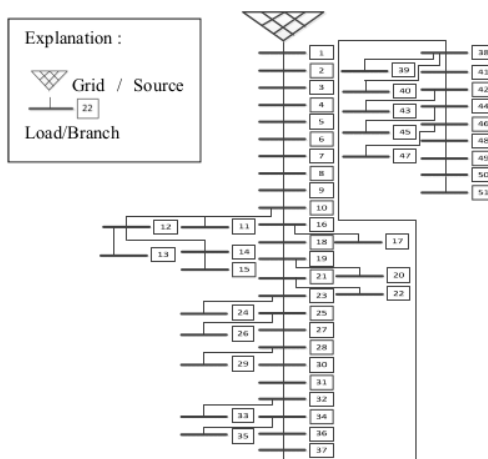


Fig. 5. Single Line Diagram Basuki Rahmat Surabaya Feeder

TABLE 1. LOAD DATA OF BASUKI RAHMAT SURABAYA FEEDER

| Bus | Load | | Bus | Load | |
|-------|---------------------------------|---------|-----|--------|---------|
| | P (MW) | Q(MVAR) | | P (MW) | Q MVAR) |
| 1 | 0.0000 | 0.0000 | 27 | 0.128 | 0.079 |
| 2 | 0.17 | 0.105 | 28 | 0 | 0 |
| 3 | 0.136 | 0.084 | 29 | 0.944 | 0.585 |
| 4 | 0.213 | 0.132 | 30 | 0.068 | 0.042 |
| 5 | 0.136 | 0.084 | 31 | 0.064 | 0.04 |
| 6 | 0.085 | 0.053 | 32 | 0 | 0 |
| 7 | 0.17 | 0.105 | 33 | 0.213 | 0.132 |
| 8 | 0.042 | 0.026 | 34 | 0 | 0 |
| 9 | 0.213 | 0.132 | 35 | 0.085 | 0.053 |
| 10 | 0 | 0 | 36 | 0 | 0 |
| 11 | 0.085 | 0.053 | 37 | 0.587 | 0.363 |
| 12 | 0 | 0 | 38 | 0 | 0 |
| 13 | 0.064 | 0.04 | 39 | 0.349 | 0.216 |
| 14 | 0.136 | 0.084 | 40 | 0.128 | 0.079 |
| 15 | 0.944 | 0.585 | 41 | 0.136 | 0.084 |
| 16 | 0 | 0 | 42 | 0 | 0 |
| 17 | 0.085 | 0.053 | 43 | 0.17 | 0.105 |
| 18 | 0.085 | 0.053 | 44 | 0 | 0 |
| 19 | 0 | 0 | 45 | 0.293 | 0.182 |
| 20 | 0.425 | 0.263 | 46 | 0 | 0 |
| 21 | 0 | 0 | 47 | 0.136 | 0.084 |
| 22 | 0.17 | 0.105 | 48 | 0.136 | 0.084 |
| 23 | 0 | 0 | 49 | 0.136 | 0.084 |
| 24 | 0.587 | 0.363 | 50 | 0.128 | 0.079 |
| 25 | 0 | 0 | 51 | 0.085 | 0.053 |
| 26 | 1.853 | 1.148 | | | |
| Total | P = 9.385 MW and Q = 5.812 MVAR | | | | |

| Network | | Impedance (Ω) | | Network | | Impedance (Ω) | |
|-----------|-------------|---------------|----------|-----------|-------------|---------------|----------|
| Start Bus | Receive Bus | r | x | Start Bus | Receive Bus | r | x |
| 1 | 2 | 0.021476 | 0.010738 | 25 | 27 | 0.00265 | 0.001325 |
| 2 | 3 | 0.002039 | 0.00102 | 27 | 28 | 0.002803 | 0.001401 |
| 3 | 4 | 0.001351 | 0.000675 | 28 | 29 | 0.001302 | 0.000651 |
| 4 | 5 | 0.002843 | 0.001422 | 28 | 30 | 0.004422 | 0.002211 |
| 5 | 6 | 0.008388 | 0.004194 | 30 | 31 | 0.009406 | 0.004703 |
| 6 | 7 | 0.010741 | 0.005371 | 31 | 32 | 0.001884 | 0.000942 |
| 7 | 8 | 0.014902 | 0.007451 | 32 | 33 | 0.002472 | 0.001236 |
| 8 | 9 | 0.002555 | 0.001278 | 32 | 34 | 0.003305 | 0.001653 |
| 9 | 10 | 0.00681 | 0.003405 | 34 | 35 | 0.002489 | 0.001244 |
| 10 | 11 | 0.002673 | 0.001336 | 34 | 36 | 0.004525 | 0.002263 |
| 10 | 12 | 0.007266 | 0.003633 | 36 | 37 | 0.003537 | 0.001769 |
| 12 | 13 | 0.000842 | 0.000421 | 36 | 38 | 0.005295 | 0.002647 |
| 13 | 14 | 0.002591 | 0.001295 | 38 | 39 | 0.002961 | 0.001481 |
| 14 | 15 | 0.007151 | 0.003575 | 38 | 40 | 0.00678 | 0.00339 |
| 10 | 16 | 0.004894 | 0.002447 | 38 | 41 | 0.004649 | 0.002324 |
| 16 | 17 | 0.004473 | 0.002237 | 41 | 42 | 0.00787 | 0.003935 |
| 16 | 18 | 0.005034 | 0.002517 | 42 | 43 | 0.001297 | 0.000648 |
| 18 | 19 | 0.009855 | 0.004928 | 42 | 44 | 0.003561 | 0.00178 |
| 19 | 20 | 0.003678 | 0.001839 | 44 | 45 | 0.002609 | 0.001305 |
| 19 | 21 | 0.004327 | 0.002164 | 44 | 46 | 0.000728 | 0.000364 |
| 21 | 22 | 0.001741 | 0.00087 | 46 | 47 | 0.000426 | 0.000213 |
| 21 | 23 | 0.003261 | 0.001631 | 46 | 48 | 0.005398 | 0.002699 |
| 23 | 24 | 0.005131 | 0.002566 | 48 | 49 | 0.0074 | 0.0037 |
| 23 | 25 | 0.006283 | 0.003141 | 49 | 50 | 0.004528 | 0.002264 |
| 25 | 26 | 0.005351 | 0.002675 | 50 | 51 | 0.003781 | 0.001891 |

TABLE III. VOLTAGE PROFILE ON THE BASUKI RAHMAT FEEDER SYSTEM BEFORE AND AFTER DG INSTALLATION

| Bus | Voltage profile on bus (p.u) | | | Bus | Voltage profile on bus (p.u) | | |
|-----|------------------------------|--------|--------|-----|------------------------------|--------|--------|
| | Initial | 1 DG | 2 DG | | Initial | 1 DG | 2 DG |
| 1 | 1.0000 | 1.0000 | 1.0000 | 27 | 0.9972 | 1.0000 | 1.0004 |
| 2 | 0.9993 | 0.9999 | 1.0000 | 28 | 0.9972 | 0.9999 | 1.0004 |
| 3 | 0.9993 | 0.9999 | 1.0000 | 29 | 0.9971 | 0.9999 | 1.0004 |
| 4 | 0.9992 | 0.9999 | 1.0000 | 30 | 0.9971 | 0.9999 | 1.0004 |
| 5 | 0.9992 | 0.9999 | 1.0000 | 31 | 0.9970 | 0.9998 | 1.0004 |
| 6 | 0.9989 | 0.9999 | 1.0000 | 32 | 0.9970 | 0.9998 | 1.0004 |
| 7 | 0.9986 | 0.9999 | 1.0001 | 33 | 0.9970 | 0.9998 | 1.0004 |
| 8 | 0.9982 | 0.9998 | 1.0001 | 34 | 0.9970 | 0.9998 | 1.0004 |
| 9 | 0.9981 | 0.9998 | 1.0001 | 35 | 0.9970 | 0.9998 | 1.0004 |
| 10 | 0.9979 | 0.9998 | 1.0001 | 36 | 0.9970 | 0.9997 | 1.0003 |
| 11 | 0.9979 | 0.9998 | 1.0001 | 37 | 0.9969 | 0.9997 | 1.0003 |
| 12 | 0.9979 | 0.9998 | 1.0001 | 38 | 0.9969 | 0.9997 | 1.0003 |
| 13 | 0.9979 | 0.9998 | 1.0001 | 39 | 0.9969 | 0.9997 | 1.0003 |
| 14 | 0.9979 | 0.9998 | 1.0001 | 40 | 0.9969 | 0.9997 | 1.0003 |
| 15 | 0.9979 | 0.9998 | 1.0001 | 41 | 0.9969 | 0.9997 | 1.0003 |
| 16 | 0.9978 | 0.9998 | 1.0002 | 42 | 0.9969 | 0.9997 | 1.0003 |
| 17 | 0.9978 | 0.9998 | 1.0002 | 43 | 0.9969 | 0.9997 | 1.0003 |
| 18 | 0.9977 | 0.9999 | 1.0002 | 44 | 0.9969 | 0.9997 | 1.0003 |
| 19 | 0.9975 | 0.9999 | 1.0003 | 45 | 0.9969 | 0.9997 | 1.0003 |
| 20 | 0.9975 | 0.9999 | 1.0003 | 46 | 0.9969 | 0.9997 | 1.0003 |
| 21 | 0.9974 | 0.9999 | 1.0004 | 47 | 0.9969 | 0.9997 | 1.0003 |
| 22 | 0.9974 | 0.9999 | 1.0004 | 48 | 0.9969 | 0.9996 | 1.0003 |
| 23 | 0.9973 | 1.0000 | 1.0004 | 49 | 0.9968 | 0.9996 | 1.0003 |
| 24 | 0.9973 | 0.9999 | 1.0004 | 50 | 0.9968 | 0.9996 | 1.0003 |
| 25 | 0.9972 | 1.0000 | 1.0005 | 51 | 0.9968 | 0.9996 | 1.0003 |
| 26 | 0.9972 | 1.0000 | 1.0004 | | | | |

TABLE II NETWORK DATA

Table I. explains that system of the Basuki Rahmat feeder (Surabaya) with a base voltage of 20 kV, has a normal voltage profile, because the standard voltage is $1.05 > \text{voltage} > 0.95$ p.u. It is happening because the distance between buses is relatively short, so it has a small impedance value. So the voltage drop in the network is low and the lowest voltage profile in the system is bus 51 with a voltage of 0.99684512 p.u in Table III. Bus 51 is the bus with the farthest distance from the source (main substation).

In Table IV, the case of three DG installations the reverse power flow phenomenon occurs especially in the active power supply. This happens because active power supply by DG is greater than the power requirements of the system and the load voltage profile value is greater than the grid voltage, so that power flows from the load to the grid. The phenomenon of reverse power flow causes losses to the system, one of which is the increase in network losses in the system so that we optimize the installation of DG only 2 DG.

Fig. 6 is a comparison graph of bus voltage profile on the Basuki Rahmat feeder system before and after DG installation.

TABLE IV. LOCATION AND OPTIMAL DG SIZE IN THE PSO-BASED BASUKI RAHMAT FEEDER SYSTEM

| DG | Optimal Size DG | | PF DG | Optimal Location DG |
|----|-----------------|-------|-------|---------------------|
| | MW | MVAR | | Bus |
| 1 | 8.094 | 5.016 | 0.85 | 25 |
| 2 | 1.363 | 0.845 | 0.85 | 44 |
| 3 | 0.8412 | 0.400 | 0.85 | 14 |

At the beginning of the power flow analysis in the condition before the DG installation, the voltage profile is under voltage. After being installed 1DG or 2 DG, the voltage profile is obtained, which is $0.95 < \text{voltage} < 1.05$.

Fig. 7 is a comparison graph of Active Power Loss on the Basuki Rahmat feeder system before and after DG installation. While Fig. 8 is a Comparison graph of Reactive Power Loss on the Basuki Rahmat feeder system before and after DG installation.

Fig 7 and Fig. 8 are representing that before DG installation, there is an active and reactive power loss, but after DG installation 1 DG also 2 DG decreases active and reactive power losses. Fig 9. a graphical User Interface (GUI) Display

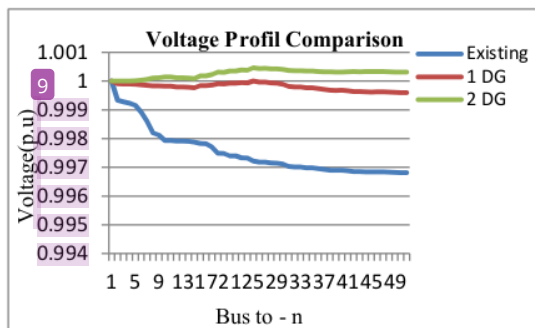


Fig. 6. Voltage Profile comparison

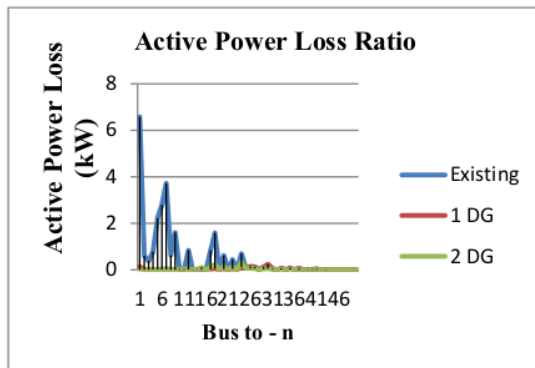


Fig. 7. Active Power Loss Ratio

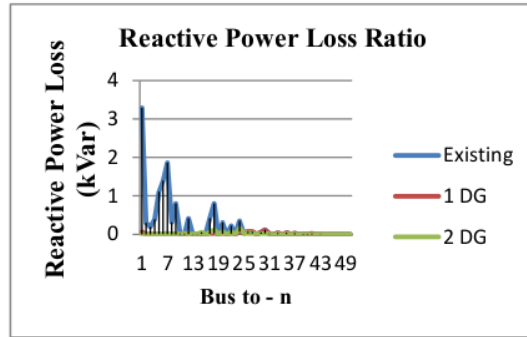


Fig. 8. Reactive Power Loss Ratio

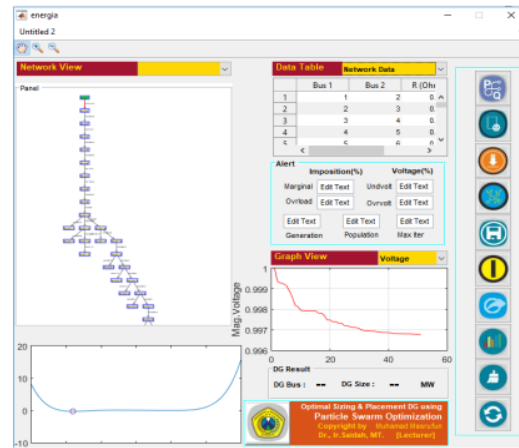


Fig. 9. Graphical User Interface

IV. CONCLUSION

In the Basuki Rahmat feeder system (Surabaya), the optimal DG number is 1 DG, that is, on bus 25, a DG capacity of 9.5 MVA. The installation was able to reduce the total network power loss from 25.38 kW to 1.56 kW and raise the voltage profile for higher voltage values.

V. REFERENCES

- [1] Priyanka Das, "Placement of Distributed Generation In A Radial Distribution System Using Loss Sensitivity Factor And Cuckoo Search Algorithm. International Journal of Research in Engineering & Advanced Technology, Volume 3, Issue 2, April-May, 2015
- [2] G. Sasi Kumar, Dr. S. Sarat Kumar, Dr. S.V. Jayaram Kumar, "DG Placement Using Loss Sensitivity Factor Method for Loss Reduction and Reliability Improvement in Distribution System. International Journal of Engineering & Technology, 7 (4.22) (2018) 236-240
- [3] Hermawan, Susatyo Handoko, "Analisis Pengaruh Rekonfigurasi Jaringan Pada Sistem Distribusi Tegangan Menengah Dengan Distributed Generation untuk Mereduksi Rugi Daya Menggunakan

Particle Swarm Optimization", Jurusan Teknik Elektro , Fakultas Teknik Universitas Diponegoro 2013

- [4] Mira Erviana, Ir. Yuningtyastuti ,MT, Susatyo Handoko, ST., MT. "Optimasi Penempatan Dan Kapasitas Kapasitor Bank Pada Sistem Distribusi Untuk Mereduksi Rugi Daya Menggunakan *Particle Swarm Optimization*", Jurusan Teknik Elektro , Fakultas Teknik Universitas Diponegoro.2012
- [5] Kumar Mahesh, Perumal A/L Nallagownden , Irraivan A/L Elamvazuthi, "Optimal Placement and Sizing of DG in Distribution System Using Accelerated PSO for Power Loss Minimization", 2015 IEEE.
- [6] M.Padma Lalitha,V.C. Veera Reddy, V.Usha, "Optimal DG Placement For Minimum Real Power Loss In Radial Distribution Systems Using PSO", Journal of Theoretical and Applied Information Technology, 2010.
- [7] Ramadoni Syahputra1, Indah Soesanti, Mochamad Ashari, "Performance Enhancement of Distribution Network with DG Integration Using Modified PSO Algorithm", Journal of Electrical Systems, 2016.
- [8] Kennedy J and Eberhart R, "Particle Swam Optimizer," IEEE International Conference on Neural Networks (Perth, Australia), IEEE Service Center Piscataway, NJ, IV, pp1942-1948, 1995
- [9] Ridho Fuaddi, Ontoseno Penangsang, dan Dedet Candra Riawan "Penentuan Lokasi DG dan Kapasitor Bank dengan Rekonfigurasi Jaringan untuk Memperoleh Rugi Daya Minimal pada Sistem Distribusi Radial Menggunakan Algoritma Genetika", Jurusan Teknik Elektro , Fakultas Teknologi Industri, Institut Sepuluh Nopember Surabaya.2016
- [10] Augusta, Yoga Alif, "Optimasi Penempatan dan Kapasitas Multi DG pada Sistem Distribusi dengan Metode Flower Pollination Algorithm (FPA) ", Jurusan Teknik Elektro , Fakultas Teknologi Industri Universitas Islam Indonesia Yogyakarta.2018
- [11] Ahmad Zakaria H, SjamsulAnam, dan Imam Robandi "Penempatan Dan Penentuan Kapasitas Optimal *Distributed Generator* (DG) Menggunakan *Artificial Bee Colony* (ABC)", Jurusan Teknik Elektro , Fakultas Teknologi Industri, Institut Sepuluh Nopember Surabaya.2016
- [12] Ahmad Zakaria H, SjamsulAnam, dan Imam Robandi "Penempatan Dan Penentuan Kapasitas Optimal *Distributed Generator* (DG) Menggunakan *Artificial Bee Colony* (ABC)", Jurusan Teknik Elektro , Fakultas Teknologi Industri, Institut Sepuluh Nopember Surabaya 2016.
- [13] A.G. Bhutad,"Three- Phase Load Flow Methods for Radial Distribution Networks", Maharasta State Electricity Board Prakashgad, Bandra(E), Mumbai, 2003

Optimization of DG Placement and Size Using PSO Based on GUI

ORIGINALITY REPORT

9%

SIMILARITY INDEX

PRIMARY SOURCES

| | | |
|---|--|-----------------|
| 1 | www.coursehero.com Internet | 64 words — 2% |
| 2 | kinetik.umm.ac.id Internet | 59 words — 2% |
| 3 | catalog.lib.fit.edu Internet | 30 words — 1% |
| 4 | docobook.com Internet | 25 words — 1% |
| 5 | journal.esrgroups.org Internet | 21 words — 1% |
| 6 | article.nadiapub.com Internet | 19 words — 1% |
| 7 | www.igi-global.com Internet | 16 words — < 1% |
| 8 | docs.rapidminer.com Internet | 15 words — < 1% |
| 9 | vbn.aau.dk Internet | 15 words — < 1% |

| | | |
|----|---|-----------------|
| 10 | res.mdpi.com Internet | 13 words — < 1% |
| 11 | eprints.utm.my Internet | 11 words — < 1% |
| 12 | link.springer.com Internet | 11 words — < 1% |

EXCLUDE QUOTES ON

EXCLUDE MATCHES < 10 WORDS

EXCLUDE BIBLIOGRAPHY ON